



Toll Free: 87 PERMATEX  
(877-376-2839)

10 Columbus Blvd., Hartford,  
Connecticut 06106

6875 Parkland Boulevard, Solon  
Ohio 44139

## Technical Data Sheet

# Permatex® Aerosol Rust Treatment

AAM Revised 05/07

### PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex® Aerosol Rust Treatment is a fast drying, vinyl coating that sprays on clear and converts rust to a black metal-protective coating that prevents continued corrosion. The product protects the surface as a pre-primer.

### PRODUCT BENEFITS

- Neutralizes rust and prevents additional rust
- Converts and primes in one operation
- Eliminates sandblasting
- Works on damp, rusty metal

### TYPICAL APPLICATIONS


#### AAM

- Under hood applications
- Wheel wells

### DIRECTIONS FOR USE

**NOTE: This product is not recommended for use under exterior automotive sheet metal finishes. May cause blistering or peeling.**

1. Provide adequate ventilation.
2. For best results, apply to clean, dry surfaces. Remove loose rust with a wire brush. Surface rust must be present.
3. Shake can well. Note: The product does not require a ball agitator. For best results, the aerosol can should be at room temperature before spraying.
4. Holding can 8 to 10 inches from the surface, press the nozzle and uniformly discharge the product to the corroded area. A black coating will appear in about 5 minutes. Uneven color indicates need for additional coats. Apply second coat within 2 minutes.

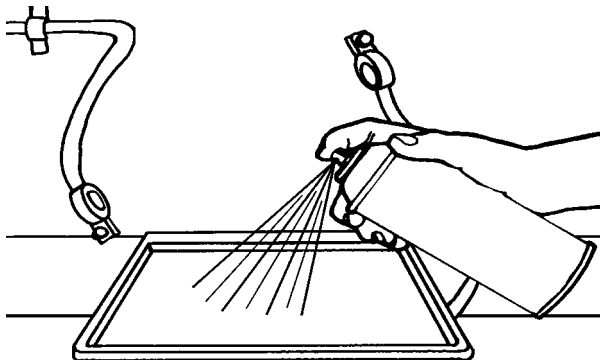

5. **NOTE:** After complete drying, Permatex Aerosol Rust Treatment must be topcoated for maximum durability. Allow 24 hours minimum to dry before applying a finish paint. Water based finish topcoat paints will require an additional non-water based primer prior to application of

topcoat.

Note: Aerosol product (3 coats) will cover 10 to 12 square feet at 2 mil DFT.

### For Cleanup

1. Turn can upside-down and spray to clear nozzle.
2. Clean hands with Permatex® brand hand cleaners.

### PROPERTIES OF MATERIAL

	Typical Value
Chemical Type	Vinyl butyral
Appearance	Clear liquid
Odor	Pungent
Flash Point	Aerosol, contents under pressure, consult MSDS
NFPA 704 Flammability Rating	3 (Flammable)

### GENERAL INFORMATION

**This product is not recommended for use in pure oxygen and/or oxygen rich systems.**

**For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).**

### ORDERING INFORMATION

Part Number	Container Size
81849 (79DA)	16 oz. aerosol can

### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **ITW Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.

THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.

PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-87PERMATEX)